


Features

- **Resettable Combination**
- **Stainless Steel Body**
- **Tough Steel Construction**
- **Hardened Steel Closed Shackle**

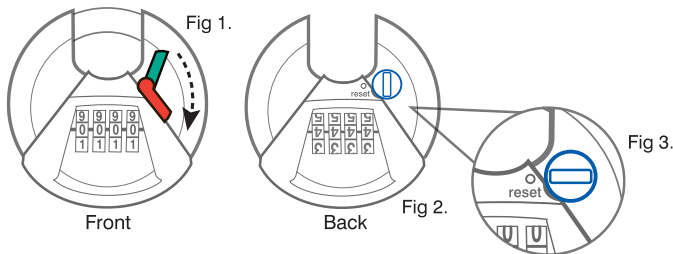

To Open: Set the 4 dials to the combination along the central line and rotate the lever clockwise to open the shackle (**fig 1**). The pre-set factory combination is 0-0-0-0.

Set Your Own Combination

Note: Ensure shackle is fully open when setting your combination.

1. On the back of the lock, turn the code change slot 90° to the RESET position, using a small coin (**fig 3**).
2. Set your own secret number by turning the 4 numbered dials. Your new number must be positioned centrally on the front of the padlock, along the centre line.
3. Memorise and record the secret number then on the back of the lock, return the code change slot to the original vertical position (**fig 2**), taking care not to move the numbered dials.
4. **Note:** It is now important to fully close and then fully open the shackle using the lever to confirm the new code (**fig 1**).

To Lock: With the shackle in the fully closed position, scramble the dials.

Maintenance: Clean and lubricate lock regularly with powdered graphite or light spray oil

Sterling Locks Limited

Leeds Bradford Airport Industrial Estate
Harrogate Road, Yeadon, Leeds LS19 7WP

www.sterlinglocks.com